



Redundant Dual with Trays FCS300R



Features

- Two hot swappable converters in 1U
- 70 MHz IF
- Cost effective solution
- 1:1 Redundancy included
- 125 kHz step size
- Meets or exceeds IESS 308/309 requirements
- High linearity
- Front panel control (local)
- Full remote control (remote) RS485 or RS232

Overview

The Advantech Dual - HP range of converters uses the latest technology in conversion, giving two independent conversion chains in 1 RU package, local and remote control thus providing the ultimate in performance and user friendly operation at a very competitive price.

The spectral purity, low phase noise and stability exceed the requirements of all major international satellite network operators. The hot swappable 1:1 redundancy feature provides for the ultimate flexibility in a very compact package.

The flexible and comprehensive monitor and control features on the HP converter ensure that it will fit into any network management system architecture. The user-friendly front panel or the RS485 remote interface will provide full set-up and fault monitoring facilities. The RS232 will provide the Monitor and Control functions via a PC and will also allow for software downloading.

The converter uses a PLL oscillator either locked to a highly stable internal 10 MHz reference or if the external reference option is fitted and the proper level of signal is present, the PLL oscillator will automatically lock to the external reference.

Application

The HP range of converters is particularly suited for use in VSAT, SCPC Networks, SNG, DVB-RCS and Hub systems where compact redundancy is required. This makes them an ideal choice for large earth stations requiring cost effective solutions for frequency conversion. The lightweight, rugged and compact design also ensures that the HP converter provides the ideal solution for mobile truck or flyaway DSNG systems. With fully welded aluminum chassis and robust modular internal construction the converter can even meet the demands of military installations. The HP range of converters provides an industry leading MTBF of over 120,000 hours.


Operating Bands

Up-Converters

Model Number	RF Output	IF Frequency
ARUD-70KSR	14.00 – 14.50 GHz	70 MHz
ARUD-70KXR	13.75 – 14.50 GHz	70 MHz

Down-Converters

Model Number	RF Output	IF Frequency
ARDD-K1 70 R	10.95 – 11.70 GHz	70 MHz
ARDD-K2 70 R	11.70 – 12.20 GHz	70 MHz
ARDD-K3 70 R	12.25 – 12.75 GHz	70 MHz

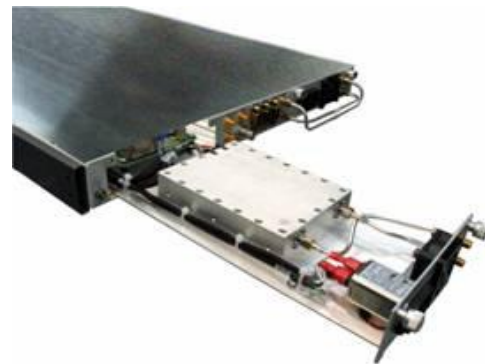

Options

- 140 MHz IF Frequency
- Ethernet port and SNMP Interface
- Low Group Delay (option)
- 10 MHz External/Internal Reference with Autosensing

Ku-Band Frequency Converter

Technical Specifications

Up-Converter		Down-Converter	
IF Input		RF Input	
Frequency range	70 ± 18 MHz 140 ± 36 MHz (optional)	Frequency range	(See table on front page)
Impedance	50 Ω (optional 75Ω)	Impedance	50 Ω
Input Connector	BNC (female)	Input Connector	Type N (female)
Return loss	18 dB	Return loss	18 dB
RF Output		IF Output	
Output power (P1dB)	0 dBm	Frequency range	70 ± 18 MHz 140 ± 36 MHz (optional)
Frequency range	(See table on front page)	Output level	+5 dBm at P1dB
IMD3 (two tone)	-40 dBc max @ -10 dBm output	Output Connector	BNC (female)
Output connector	Type N (female)	Connector Impedance	50 Ω (optional 75Ω)
Connector Impedance	50 Ω	Return Loss	18 dB
Return loss	18 dB		
Transfer Characteristics		Transfer Characteristics	
Conversion Gain	20 dB @ max gain setting	Conversion Gain	40 dB min @ max gain setting
Gain adjustment	20 dB (0.1 dB step size)	Gain adjustment	20 dB (0.1 dB step size)
Gain flatness	1.5 dB p-p max. 36 MHz 2.0 dB p-p max. 72 MHz	Gain flatness	1.5 dB p-p max. 36 MHz 2.0 dB p-p max. 72 MHz
Gain stability	±0.25 dB max. /24 hours ±1 dB over temp. range	Gain stability	±0.25 dB max. / 24 hours ±1 dB over temp. range
Spurious	-55 dBc carrier related @ -10 dBm < -50 dBm non-carrier related	Spurious	-55 dBc @ -5 dBm output
Group delay (over 36 MHz)	10 -15 ns p-p	Group delay (over 36 MHz)	10 -15 ns p-p
Group delay (with optional group delay equalizer)	Linear 0.03 ns/MHz Parabolic 0.01 ns/MHz ² Ripple 1 ns p-p	Group delay (with optional group delay equalizer)	Linear 0.03 ns/MHz Parabolic 0.01 ns/MHz ² Ripple 1 ns p-p
		Image rejection	50 dBc
		Noise Figure	20 dB
Phase noise	Meets or Exceeds IESS 308/309	Phase noise	Meets or Exceeds IESS 308/309
Synthesizer step size	125k kHz	Synthesizer step size	125 kHz
Reference		Mechanical	
External Reference	10 MHz (optional)	Dimensions	Width 19" (482.6 mm)
Internal reference stability	± 2 x 10 ⁻¹⁰ / day		Height 1U 1.75" (44.5 mm)
Aging	± 5 x 10 ⁻⁸ / year		Depth 28" (711.2 mm)
Environmental		Power Supply	
Operational	0°C to +50°C standard	Voltage	90 – 265 VAC (47 – 63 Hz)
Storage	-55°C to +85°C	Power	50W (typical)
Humidity	Non-condensing	Connector	IEC 603320 10A
Altitude	3,000m AMSL		
		Monitor and Control	
		RS 485	DB9
		RS 232	DB9
		Discrete	DB9
		Ethernet (optional)	RJ45 F (optional)

NORTH AMERICA
USA
Tel: +1 703 788-6882
Fax: +1 703 788-6511
sales@advantechwireless.com

CANADA
Tel: +1 514 420-0045
Fax: +1 514 420-0073
sales@advantechwireless.com

EUROPE
UNITED KINGDOM
Tel: +44 1480 357 600
Fax: +44 1480 357 601
sales@advantechwireless.com

RUSSIA & CIS
Tel: +7 495 967 1859
Fax: +7 495 967 30 24
sales@advantechwireless.com

SOUTH AMERICA
BRAZIL
Tel: +55 11 3054 5701
Fax: +55 11 5041 4026
sales@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-FCS300R-Ku-11039