




500W to 600W ARMA-4000X® series

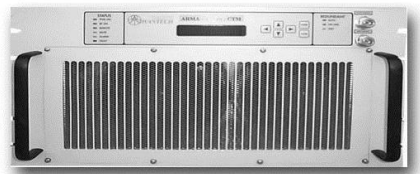

Features

- High gain and linearity
- Output power up to 600W (see table A)
- Gain adjustment (Local & Remote)
- Remote Monitor & Control (Local & Remote)
- Output sample monitor port
- Temperature gain compensation
- Automatic over-temperature shutdown
- Automatic high reflected power shutdown
- Infinite VSWR protection
- Power factor correction
- CE Marking

Overview

The ARMA-4000X® series are the rack-mount solid-state power amplifiers (SSPAs), operating in X-Band frequency range. The amplifier is an integrated unit, complete with power supply and cooling system. Intended for indoor operation, the amplifiers are of compact size and occupy six rack-mounting spaces (6 RU - 10½") of a standard 19-inch rack. Built-in microprocessor controller provides capability for serial port interfaces (RS485) for remote monitoring and control.

Advantech's SSPAs set the industry standard for linearity and operating efficiency. Built-in design features and assembly methods incorporated with efficient combining techniques result in the trouble-free operation of the amplifier.

Application

The featured SSPAs are designed for X-Band satellite up-link applications. They are designed for 19-inch rack mounting in a protected environment. The ARMA-X series are available in output power from 20W to 800W. For higher power Advantech provides phase-combined systems.

Other SSPAs are available for operation at other satellite frequency bands. With all the features of the ARMA-X, Advantech also offers a built-in converter.

Redundancy

With the addition of the appropriate waveguide and switch kit, the ARMA-X® amplifiers can be easily converted for the operation in 1:1 redundant configuration with full remote monitor and control capability of the redundant system via serial interface.

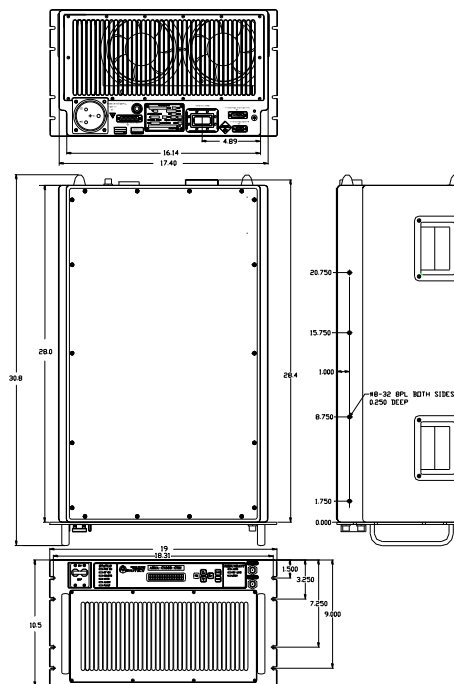


Table A

Band*	RF Band (GHz)	Output Power (W)
X	7.90 – 8.40 GHz	500 - 600

*Other frequency sub-bands are available. Please consult factory.

Options

- Integrated Block Up Converter
- RF input sample port
- Redundant system

Accessories

- Redundancy Kit
- Shelf slides
- Remote M&C panel (Ethernet port optional)
- Receive Reject Filter

X-Band Rack-mount SSPA

Technical Specifications			500W		600W	
Electrical Characteristics						
Availability in this series						
X			√		√	
Output power (Psat)			+57 dBm		+58 dBm	
Output power (P1dB)			+56 dBm		+57 dBm	
Power gain at maximum gain setting			70 dB min			
Operating frequency range			7.90 – 8.40 GHz			
Max input power without damage			+10 dBm			
Gain slope			0.6 dB max over 40 MHz			
Gain flatness over 500 MHz			±1.0 dB max			
Gain variation over temperature			±1.5 dB over full operating temperature range			
Gain variation over 24 hours			±0.25 dB max at constant temperature & drive level			
Gain adjustment range			20 dB min. (0.1 dB resolution)			
Input return loss			18 dB			
Output return loss			19 dB			
Noise power density			-70dBm/Hz max in TX band -110 dBm/Hz max 7.25 – 7.75 GHz RX band			
Spurious at rated power			-65 dBc, max			
Harmonics at rated power			-60 dBc, max			
AM/PM conversion at rated power			2.5°/dB max. at P1dB, 1°/dB max. at 3 dB back-off			
Third order IMD (2 tones 5 MHz apart)			-25 dBc max. at 3 dB total back-off from rated P1dB			
Group delay			Linear: 0.02 nsec/MHz max. Parabolic: 0.003 nsec/MHz ² max. Ripple: 1.0 nsec p-p max.			
Residual AM (F* - frequency in kHz)			0-10 kHz -45 dBc 10 kHz - 500 kHz -20 (1.25+log F*) dBc 500 kHz - 1 MHz -80 dBc			
Power Requirements						
AC input voltage			180-264 VAC (47-63 Hz)			
Power consumption (nominal)			3500W		4000W	
Mechanical Characteristics						
Panel height			6 RU of 19" rack			
Weight			65 kg (143 lbs.)			
Interfaces:	RF input RF output	N-Type (F) CPR-112 contact	Redundancy RS-485 Discrete port	D-sub 15S D-sub 9S D-sub 25S	AC Line Output sample port	IEC 309 inlet N-Type (F)
Environmental Conditions						
Operating temperature:			0°C to +50°C			
Humidity			5%-95%, non-condensing			
Altitude			10,000' AMSL, de-rated 2°C/1,000' from AMSL			

NORTH AMERICA
USA
Tel: +1 678 889-1831
Fax: +1 678 889-1756
info.usa@advantechwireless.com

CANADA
Tel: +1 514 420 0045
Fax: +1 514 420 0073
info.canada@advantechwireless.com

EUROPE
UNITED KINGDOM
Tel: +44 1480 357 600
Fax: +44 1480 357 601
info.uk@advantechwireless.com

RUSSIA & CIS
Tel: +7 495 971 59 18
info.russia@advantechwireless.com

SOUTH AMERICA
USA
Tel: +1 678 889-1831
Fax: +1 678 889-1756
info.latam@advantechwireless.com

BRAZIL
Tel: +55 11 3054 5701
Fax: +55 11 3054 5701
info.brazil@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-ARMA-X-500-600-12106