



60W to 250W
AWMA-3000X™ series



Features

- Remote Monitor & Control
- High gain and linearity
- Output power up to 250W (see table A)
- Gain adjustment
- Output sample monitor port
- Temperature gain compensation
- Automatic over-temperature shutdown
- Automatic high reflected power shutdown
- Infinite VSWR protection
- CE Marking

Overview

The AWMA-X series are the outdoor solid-state power amplifiers (SSPAs), operating in X-Band frequency range. The amplifier is an integrated unit, complete with power supply and cooling system. Intended for outdoor operation, the AWMA-3000X® is weatherproof. Built-in microprocessor controller provides the capability for serial port interfaces (RS485) for remote monitoring and control.

Advantech's SSPAs set the industry standard for linearity and operating efficiency. Built-in design features and assembly methods incorporated with efficient combining techniques result in the trouble-free operation of the amplifier.

Application

The SSPAs are designed for X-Band satellite up-link applications. They are mounted outdoors, near the hub of an antenna. The AWMA-X series are available in output power from 20W to 800W. For higher power Advantech provides phase-combined systems.

Other SSPAs are available for operation at other satellite frequency bands. With all the features of the AWMA-X, Advantech also offers a built-in converter.

Redundancy

With the addition of the appropriate waveguide and switch kit, the AWMA-3000X™ amplifiers can be easily converted for the operation in 1:1 redundant configuration without the use of any external controller. Full remote Monitor and Control of the redundant system is accessible via the serial port (RS-485).


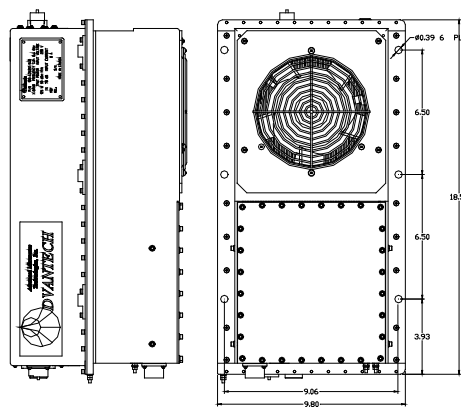



Table A

Band*	RF Band (GHz)	Output Power (W)
X	7.90 – 8.40 GHz	60 - 250

*Other frequency sub-bands are available. Please consult factory.

Options

- Integrated Block Up Converter
- Additional harmonic filter
- Extreme temperature operation
- Redundant system
- External Receive or Transmit Reject Filter

Accessories

- Redundancy Kit
- Mounting Frames
- Remote M&C panel (Ethernet port optional)

X-Band Hub-mount SSPA

Technical Specifications			60W	80W	100W	125W	150W	200W	250W
Electrical Characteristics									
Availability in this series									
X			√	√	√	√	√	√	√
Output power (P _{SAT})			+48 dBm	+49 dBm	+50 dBm	+51 dBm	+52 dBm	+53 dBm	+54 dBm
Output power (P1dB) min			+47 dBm	+48 dBm	+49 dBm	+50 dBm	+51 dBm	+52 dBm	+53 dBm
Power gain @ maximum gain setting			56 dB min 60 dB min						
Operating frequency range			See table A on front page						
Max input power without damage			+10 dBm						
Gain slope			0.6 dB max over 40 MHz						
Gain flatness over 500 MHz			±1.0 dB						
Gain variation over temperature			±1.5 dB over full operating temperature range						
Gain variation over 24 hours			±0.25 dB max @ constant temperature & drive level						
Gain adjustment range			20 dB (0.1 dB resolution)						
Input return loss			18 dB						
Output return loss			19 dB						
Noise power density			-70dBm/Hz max in TX band -110 dBm/Hz max 7.25 – 7.75 GHz RX band						
Spurious at rated power			-65 dBc, max						
Harmonics at rated power			-60 dBc, max						
AM/PM conversion at rated power			2.5°/dB max. at P1dB, 1°/dB max. at 3 dB back-off						
Third order IMD (2 tones 5 MHz apart)			-26 dBc max. at 3 dB total back-off from rated P1dB						
Group delay			Linear: 0.02 nsec/MHz max. Parabolic: 0.003 nsec/MHz ² max. Ripple: 1.0 nsec p-p max.						
Residual AM (F* - frequency in kHz)			0-10 kHz 10 kHz - 500 kHz 500 kHz - 1 MHz				-45 dBc -20 (1.25+log F*) dBc -80 dBc		
Power Requirements									
AC input voltage			110/220 VAC auto ranging (47-63 Hz)						
Power consumption (nominal)			600W	710W	850W	900W	1200W	1500W	1600W
Mechanical Characteristics									
Dimensions (L x W x H)			18.50" x 9.80" x 9.21" (46.99 x 24.89 x 23.39 cm)						
Weight			32 kg (70 lbs)						
Interfaces:	RF input Output sample port AC Line	Type N (Female) Type N (Female) MS3102R16-10P	Redundancy Discrete port RS-485	MS3112E14-12P MS3112E16-26P MS3112E10-6P			RF output: CPR112 Contact		
Environmental Conditions									
Temperature:	Operating Storage	-30°C to +55°C; Option: 1: -40°C to +55°C; 2: -50°C to +50°C -55°C to +85°C							
Humidity		100%, condensing (2" rain/hour)							
Altitude		10,000' AMSL, de-rated 2°C/1,000' from AMSL							

NORTH AMERICA
USA
Tel: +1 703 659 9796
Fax: +1 703 635 2212
info.usa@advantechwireless.com

CANADA
Tel: +1 514 420 0045
Fax: +1 514 420 0073
info.canada@advantechwireless.com

EUROPE
UNITED KINGDOM
Tel: +44 1480 357 600
Fax: +44 1480 357 601
info.uk@advantechwireless.com

RUSSIA & CIS
Tel: +7 495 971 59 18
info.russia@advantechwireless.com

INDIA
Tel: +91 33 2415 5922
info.india@advantechwireless.com

SOUTH AMERICA
Tel: +1 514 420 0045
Fax: +1 514 420 0073
info.latam@advantechwireless.com

BRAZIL
Tel: +55 11 3054 5701
Fax: +55 11 3054 5701
info.brazil@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-AWMA-X-60-250-13150