



**Advantech
Wireless**

**300W / 350W / 400W / 500W / 600W
X-Band BUC
SSPA/ SSPB
SapphireBlu™ - GaN Technology**



SSPB (BUC) SSPBM-X 2200-G series



Features

- Output power of up to 600W in a single package
- High linearity
- Full M&C capability via RS485 or Ethernet port
- Weatherproof construction
- CE marking
- MIL-STD-188-164A latest revision compliant

Overview


Based on GaN technology the new G-Series X-Band BUCs provide high power density in a compact size. Combined with the traditional Advantech Wireless features, these new series of BUCs provide the ultimate in performance and convenience. The products in the new G-Series X-Band BUCs are available as SSPA or SSPB (BUC).

Options

- Ethernet port
- 70 dB Receive Reject Filter (external)
- Harmonic filter (external)

Accessories

- Mounting kits
- External Receive Reject Filter
- External Transmit Reject Filter (for RX path)
- Remote M&C panel with optional SNMP
- Flexible and rigid waveguides
- Mounting frames
- High power terminations
- Replacement fans

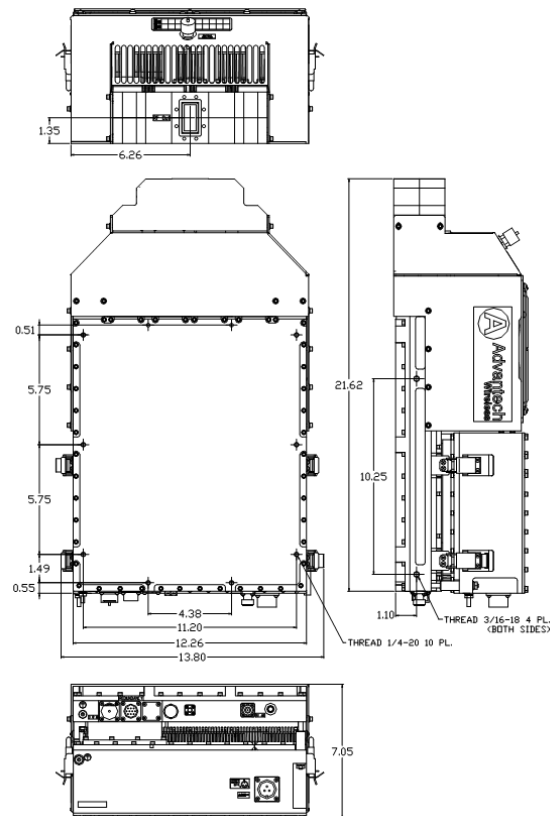

Outline

X-Band 300W/350W/400W/500W/600W BUC SSPA/SSPB SapphireBlu™ GaN Technology



General Specifications					
	300W	350W	400W	500W	600W
Operating Frequency	7.9 – 8.4 GHz				
L-Band input (BUC)	950 – 1450 MHz				
Output Power	P _{SAT} +55.0 dBm min P _{LINEAR} +51.0 dBm	P _{SAT} +55.5 dBm min P _{LINEAR} +51.5 dBm	P _{SAT} +56.0 dBm min P _{LINEAR} +52.0 dBm	P _{SAT} +57.0 dBm min P _{LINEAR} +53.0 dBm	P _{SAT} +57.8 dBm min P _{LINEAR} +54.0 dBm
Gain SSPB	74dB ± 3 dB				
Gain SSPA	64dB ± 3 dB Optional 74 ± 3 dB				
Gain adjustment range	20 dB in 0.1 dB steps				
Gain flatness over full band	4 dB p-p max				
Gain slope over 40 MHz	1dB p-p dB max				
Gain variation over temperature	± 1.5 dB max				
Input Impedance and VSWR	50 Ω 1.3:1				
Output VSWR	1.25:1 with optional Output Isolator				
Noise power density	-75 dBm/Hz in Transmit Band, -110 dBm/Hz in Receive Band (7.25 – 7.75 GHz) -145 dBm/Hz with optional external Receive Reject Filter				
Spurious	-55 dBc max at P _{LINEAR}				
Harmonics	-40 dBc @ P _{LINEAR}				
AM/PM conversion	1º/dB at P _{LINEAR}				
Third order intermod (two tones)	-25 dBc two signal 5 MHz apart at P _{LINEAR}				
Spectral regrowth	30 dBc @ P _{LINEAR}				
Group delay	Ripple 1 nsec p-p max				
Local Oscillator freq.	6.95 GHz				
Phase Noise	-53 dBc/Hz at 10Hz -83 dBc/Hz at 10 kHz -63 dBc/Hz at 100Hz -95 dBc/Hz at 100 kHz -73 dBc/Hz at 1000Hz				
External Reference Frequency phase noise (max)	10 MHz -120 dBc/Hz at 10Hz -155 dBc/Hz at 10 kHz -135 dBc/Hz at 100Hz -160 dBc/Hz at 100 kHz -150 dBc/Hz at 1000Hz				
Weight & Dimensions					
Dimensions (L W xH)	21.6" x 12.26" x 7.05" (549x311x179mm)				
Weight	57.3 lbs. (26 kg)				
Input voltage	AC 90 – 265 VAC (47 – 63 Hz)				
Power consumption (nominal)	1600W at Psat 1400W at P _{LINEAR}			1900W at Psat 1700W at P _{LINEAR}	
Interfaces:	RF input Type N (F) RF output CPR-112G Relay port MS3112E12-10P AC Line MS3102R16-10P		Redundancy RS-232 RS-485	MS3112E16-26P MS3112E10-6P MS3112E10-6P	
Environmental	Temperature Operating -30°C to +55 °C Option 1 -40°C to +55 °C Storage -55°C to +85 °C Humidity 100% condensing Altitude 10,000' AMSL, de-rated by 2 °C/1000' from AMSL				

P_{LINEAR} is the power at which the IMD specs are met and the spectral regrowth is <-30 dBc @ 1.0 x symbol rate for QPSK/OQPSK/8PSK modulation

NORTH AMERICA
USA
Tel: +1 703 659 9796
Fax: +1 703 635 2212
info.usa@advantechwireless.com

CANADA
Tel: +1 514 420 0045
Fax: +1 514 420 0073
info.canada@advantechwireless.com

EUROPE
UNITED KINGDOM
Tel: +44 1480 357 600
Fax: +44 1480 357 601
info.uk@advantechwireless.com

RUSSIA & CIS
Tel: +7 495 971 59 18
info.russia@advantechwireless.com

INDIA
Tel: +91 33 2415 5922
info.india@advantechwireless.com

SOUTH AMERICA
Tel: +1 514 420 0045
Fax: +1 514 420 0073
info.latam@advantechwireless.com

BRAZIL
Tel: +55 11 3054 5701
Fax: +55 11 3054 5701
info.brazil@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-SSPB-M-X-300-600-13325